


MSMC010MC CONDENSING UNIT



Note: Pictures are for illustration only,
and may not reflect the listed model.

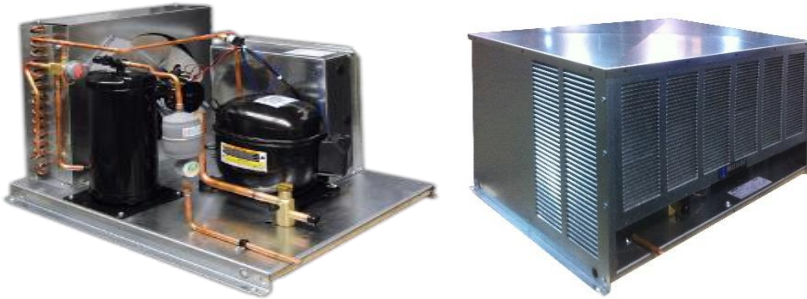

GENERAL						
REFRIGERANT	VOLTAGE	COMPRESSOR TYPE	COMPRESSOR MODEL	HP	AWEF	LISTINGS
R-454C	208-230/60/3	Scroll	YB07KAE-TF5	1	7.6	UL/CUL

BTUH CAPACITY (At Saturated Suction Temperature (SST) and 90° Ambient at Condenser)							
-30	-20	-10	20	25	30	35	45
-	-	-	7,299	8,102	8,969	9,901	-

BTUH CAPACITY (At Saturated Suction Temperature (SST) and 100° Ambient at Condenser)							
-30	-20	-10	20	25	30	35	45
-	-	-	6,715	7,454	8,251	9,109	-

DIMENSIONAL DATA					
OVERALL (to nearest inch)			WT (lbs)	BASE SIZE	BASE/HOOD
L	W	H			
38	27	18	240	M2	O21M

INSTALLATION				
REFRIGERANT	RECEIVER TANK (lbs) 90%/90°F	CONNECTIONS		ESTIMATED TOTAL HEAT REJECTION (BTUH)
		LIQUID	SUCTION	
R-454C	10.1	3/8	7/8	10,284

ELECTRICAL							
MCA	MOP	COMP VOLTS	COMP PHASE	COMP HZ	COMP RLA	COMP LRA	OTHER LOAD DATA
11.7	15	208-230	3	60	4.7	37.8	
FAN PHASE	FAN HZ	FAN FLA	FAN HP	FAN QUANTITY	MAX EVAP FAN AMPS	MAX EVAP DEF HEATER AMPS	PHASE 1
1	60	0.67	1/20	2	4	15.0	AMPS 0.5

