

Hausmann

8/31/2026

Landscaping & Irrigation

39

Logan View Public Schools

8/31/2026

Notes: Bid Package 06	Budget:	\$50,000
Construction Drawings Dated 07/15/2026	Actual:	\$48,361
Addendums: 1 & 2	Delta:	\$
Project Specifications Dated 07/15/2026		(1,639.00)

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Panga Lawn Services	ASPM	Lanoha Nurseries	Quality Irrigation (Irrigation Only)
Quote	\$48,085	\$45,063	\$52,370	\$39,477
Fine grading of lawn and planting areas to the elevations, slopes, and profiles indicated	Included	Included	Included	Excluded
Complete permanent seeding with SuperTurf II seed, including seedbed preparation, specified application rate, fertilizer, straw mulch or erosion-control blanket where required, tackifier, watering, maintenance, and reseeding	Included	Included	Included	Excluded
Complete temporary seeding where indicated, including oats applied at a minimum rate of 64 pounds per acre, fertilizer, straw mulch, tackifier, watering, maintenance, repair, and reseeding	Included	Included	Included	Excluded
Shrubs & Trees	Not Included	Not Included	Not Included	Not Included
Furnish and install the complete irrigation system downstream of PENRO's designated points of connection, including irrigation piping serving football-field areas where indicated	Not Included	Not Included	Included	Excluded
Provide irrigation excavation, backfill, piping, taps and connections, backflow preventers, valves, valve boxes, sprinkler heads, controllers, sensors, control wiring, programming, and all required accessories	Not Included	Not Included	Included	Excluded
Flush, test, start up, program, adjust, and demonstrate the complete irrigation system; re-space and adjust sprinkler heads as required to provide complete and balanced coverage	Not Included	Included	Included	Excluded
Include multiple mobilizations, watering, mowing, weed control, fertilizing, repair, reseeding, maintenance, irrigation as-built drawings, warranties, and closeout through final Owner acceptance	Not Included	Included	Included	Excluded
Temp Water (Allowance)	Not Included	Not Included	Not Included	Not Included
Maintenance Building Irrigation	Not Included	Not Included	Not Included	Not Included
Vandenbergh Irrigation Costs - Run irrigation to basement & provide final connections	\$1,772	\$1,772	\$1,772.00	\$1,772.00
Hausmann Supplying Irrigation Wire & Labor to run 400' of cable	\$1,526	\$1,526	\$1,526.00	\$1,526.00
General Liability Insurance	Included	Included	Included	Included
Bond	Not Included	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included	Not Included
Grand Total	\$51,383	\$48,361	\$55,668	\$42,775



8/31/2026

Site Utilities

40

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/24/2026

Addendums: 1, 2, & 3

Project Specifications Dated 07/24/2026

Budget:

\$224,125

Actual:

\$118,156

Delta:

\$ (105,969.00)

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Designer Craft	HWI	KayDee	JMJ	Premium Woods	Architectural Arts	Wood WRX	Carroll Seating
Quote	\$106,709	\$114,584	\$120,207	\$135,364	\$142,499	\$230,482	\$255,255	\$216,550
Supply of all plastic-laminate casework and countertops	Included	Included	Included	Included	Included	Included	Included	Included
Countertops include all back and sidesplashes (No solid surface)	Included	Included	Included	Included	Included	Included	Included	Included
Sink Skirts	Included	Included	Included	Included	Included	Included	Included	Included
Shop Drawings & Field Verification	Included	Included	Included	Included	Included	Included	Included	Included
Countertop & Vanity Supports	Included	Included	Included	Included	Included	Included	Included	Included
SST 1 & 2	\$11,447.00	\$10,685.51	\$3,917.00	\$16,000.00	\$16,000.00	\$16,000.00	\$16,000.00	\$16,000.00
General Liability Insurance	Included	Included	Included	Included	Included	Included	Included	Included
Bond	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Grand Total	\$118,156	\$125,270	\$126,081	\$151,364	\$158,499	\$246,482	\$271,255	\$232,550



8/31/2026

Lab Casework & Fixtures

41

Logan View Public Schools

Notes: Bid Package 06		8/31/2026
Construction Drawings Dated 07/15/2026		Budget:
Addendums: 1 & 2		Actual:
Project Specifications Dated 07/15/2026		Delta:
		\$

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Innovative Labs	H2I	Designer Craft
Quote	\$91,385	\$92,734	\$149,050
Molded epoxy-resin laboratory countertops (Furnish & Install)	Included	Included	Included
Epoxy backsplashes and end splashes	Included	Included	Included
Epoxy-resin sinks, including ADA sinks	Included	Included	Included
Sink outlets, drains, strainers and accessories	Included	Included	Included
Stainless-steel drip troughs and drain tubes	Included	Included	Included
Countertop cutouts for sinks and service fixtures	Included	Included	Included
Grommets and MEP device openings	Included	Included	Included
Subtops, supports, angles, tubing and strapping	Included	Included	Included
Countertop joints, sealants and perimeter caulking	Included	Included	Included
Shop drawings, field measurements, delivery and installation	Included	Included	Included
AC-1: Vented acid-storage base cabinet	Included	Included	Included
CMF-1: Dual-sided chemical fume hood	\$48,527	\$51,730	Included
FC-1: Flammable-storage cabinet	Included	Included	Included
DR-1: Pegboard drying rack	Included	Included	Included
ESH-1: Emergency Safety Shower & Valves	Included	Not Included	Not Included
General Liability Insurance	Included	Included	Included
Bond	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included
Grand Total	\$139,912	\$144,464	\$149,050

Hausmann

Countertop & Window Sills

42

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$26,460

Actual:


\$48,399

Delta:

\$ 21,939.00

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Lycos	CKF	Designer Craft	Lincoln Laminating
Quote	\$48,399	\$65,140	\$49,200	\$82,437
Includes a complete furnish and install scope of work	Included	Included	Included	Included
Complete SSM-1 HI-MACS solid-surface countertops and miscellaneous surfaces	Included	Included	Included	Included
Complete SSM-2 Corian solid-surface countertops and miscellaneous surfaces	Included	Included	Included	Included
Solid-surface window sills at all locations indicated	Included	Included	Included	Included
Solid-surface partial-wall, cabinet, and sloped caps where indicated	Included	Included	Included	Included
Solid-surface backsplashes, endsplashes, built-up edges, and finished exposed ends	Included	Included	Included	Included
Integral solid-surface sinks and lavatories, including all specified models	Included	Included	Included	Included
Marine-grade plywood subtops and concealed support materials	Included	Included	Included	Included
Hebgo heavy-duty steel countertop support brackets	Included	Included	Included	Included
Rakks ADA vanity brackets and associated finish panels	Included	Included	Included	Included
Sink, faucet, plumbing, electrical, and equipment cutouts	Included	Included	Included	Included
Matching seams, adhesives, sealants, and perimeter caulking	Included	Included	Included	Included
Shop drawings, field measurements, delivery, multiple mobilizations, and installation	Included	Included	Included	Included
Shop-installed integral sink bowls	Included	Included	Included	Included
General Liability Insurance	Included	Included	Included	Included
Bond	Not Included	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included	Not Included
Grand Total	\$48,399	\$65,140	\$49,200	\$82,437



8/31/2026

Finish Carpentry

43

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$184,290

Actual:


\$127,900

Delta:

\$ (56,390.00)

Bold indicates a plug number- number not received from Bidder


Subcontractor / Supplier	PHB	Tim's Custom Trim	Lieser	
Quote	\$127,900	\$179,734	\$188,325	
Install all wood doors	Included	Included	Included	
Install all door hardware	Included	Included	Included	
Storage containers for all materials	Included	Included	Included	
Cabinet and countertop installation	Included	Included	Included	
Bathroom accessories installation	Included	Included	Included	
Offloading, Sorting, and Staging	Included	Included	Included	
General Liability Insurance	Included	Included	Included	
Bond	Not Included	Not Included	Not Included	
Tax	Not Included	Not Included	Not Included	
Grand Total	\$127,900	\$179,734	\$188,325	



Rough Carpentry & Temp Construction

44

Logan View Public Schools				8/31/2026
Notes: Bid Package 06				Budget:
Construction Drawings Dated 07/15/2026				\$405,174
Addendums: 1 & 2				Actual:
Project Specifications Dated 07/15/2026				\$387,249
Bold indicates a plug number- number not received from Bidder				\$
				(17,925.00)
Subcontractor / Supplier	Hausmann	Lieser	Ramirez	
Quote	\$387,249	\$408,930	\$416,450	
In wall blocking	Included	Included	Included	
Door & Window Bucks	Included	Included	Included	
Temp Walls	Included	Included	Included	
Temp Doors & Access	Included	Included	Included	
Protection of adjacent materials	Included	Included	Included	
Roof Nailer	Included	Included	Included	
Window Bucks	Included	Included	Included	
Background checks	Included	Included	Included	
Alternate A-2	\$4,500	\$4,500	\$4,500	
Alternate A-3	\$1,818	\$1,818	\$1,818	
Alternate A-4	\$2,925	\$2,925	\$2,925	
Alternate A-5	\$827	\$827	\$827	
Alternate A-6	\$16,800	\$16,800	\$16,800	
General Liability Insurance	Included	Included	Included	
Bond	Not Included	Not Included	Not Included	
Tax	Not Included	Not Included	Not Included	
Grand Total	\$387,249	\$408,930	\$416,450	

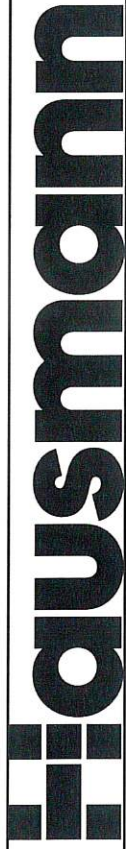

8/31/2026

Roofing

45

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$108,354

Actual:

\$133,924

Bold indicates a plug number- number not received from Bidder

\$ 25,570.00

Subcontractor / Supplier	Scott Enterprises	Lynch Contracting	McKinnis Roofing	Guaranteed Roofing
Quote	\$126,162	\$135,353	\$153,689	\$181,149
Complete adhered 60-mil black EPDM roofing system	Included	Included	Included	Included
Tie-ins between new and existing roofing systems	Included	Included	Included	Included
Restore roofing at removed RTUs, curbs, and abandoned openings	Included	Included	Included	Included
Flash and seal all new RTU curbs and equipment supports	Included	Included	Included	Included
Flash ducts, pipes, conduits, refrigerant lines, supports, and equipment rails	Included	Included	Included	Included
EPDM base flashing at parapets, curbs, walls, and vertical transitions	Included	Included	Included	Included
Walkway pads around serviceable rooftop equipment where indicated	Included	Included	Included	Included
Manufacturer inspection, repairs, closeout documentation, and warranties	Included	Included	Included	Included
Includes all mobilizations as necessary to complete this scope.	\$6,500.00	\$6,500.00	\$6,500.00	\$6,500.00
Temp Railings				
General Liability Insurance	Included	Included	Included	Included
Bond	1,262.00	2,200.00	Not Included	Not Included
Tax	Not Included	Not Included	Not Included	Not Included
Grand Total	\$133,924	\$144,053	\$160,189	\$187,649

Hausmann

8/31/2026

46

Metal Panels

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$138,500

Actual:

\$219,540

Bold indicates a plug number- number not received from Bidder

\$

\$1,040.00

Subcontractor / Supplier	City Glass	Lynch Contracting
Quote	\$219,540	\$249,920
Complete metal wall-panel and exterior cladding systems - Excludes Area C	Included	Included
Furnish and install all specified metal panel types, profiles, gauges, colors, and finishes - MP 3 & 4	Included	Included
Metal panels and associated concealed attachment systems	Included	Included
Single-skin metal wall panels and architectural metal siding	Included	Included
Metal soffit, and underside panels where indicated	Included	Included
Subframing, girts, rails, fasteners, and attachment accessories	Included	Included
Continuous insulation, thermal spacers, and isolation materials associated with panel systems	Included	Included
Base, head, jamb, corner, sill, parapet, and transition flashings	Included	Included
Closures, closure strips, foam fillers, backer plates, and end dams	Included	Included
Trim at doors, windows, louvers, penetrations, rooflines, and material transitions	Included	Included
Flashing and weatherproofing around all penetrations through metal panels	Included	Included
Sealants, backer rods, butyl tape, gaskets, and weather seals	Included	Included
Touch-up, replacement of damaged panels, cleaning, and protective-film removal	Included	Included
Shop drawings, engineering calculations (not included), delegated design (not included), and engineered fastening requirements (not included)	Included	Included
Manufacturer warranties, finish warranties, and installer workmanship warranty	Included	Included
Hoisting, lifts, scaffolding, unloading, storage, and complete installation	Included	Included
XSI	Included	Included
Standard Blue Color in lieu of custom (4,000sf - minimum)	-540	-\$92,823.00
VE Item - Will need to be accepted		
General Liability Insurance	Included	Included
Bond	Not Included	Not Included
Tax	Not Included	Not Included
Grand Total	\$219,540	\$157,097



8/31/2026

Waterproofing

47

Logan View Public Schools

Notes: Bid Package 06	Budget:	8/31/2026
Construction Drawings Dated 07/15/2026		
Addendums: 1 & 2	Actual:	\$5,600
Project Specifications Dated 07/15/2026	\$	5,600.00

Bold indicates a plug number, number not received from Bidder

Subcontractor / Supplier	Quote	Kucera Painting	FWRC
Waterproofing demolition, preparation, and repairs	Included	\$5,600	\$7,000
Complete self-adhering sheet waterproofing where indicated	Included		Included
Waterproofing at below-grade foundation walls and other indicated surfaces	Included		Included
Substrate cleaning, patching, leveling, and preparation	Included		Included
Primers, adhesives, mastics, and manufacturer-required accessories	Included		Included
Reinforcing strips at substrate cracks and construction joints	Included		Included
Waterproofing at footing-to-wall intersections	Included		Included
Waterproofing at inside and outside corners	Included		Included
Flash and seal all penetrations through waterproofed construction	Included		Included
Sheet flashing at terminations and changes in plane	Included		Included
Tie-ins to adjacent and existing waterproofing systems	Included		Included
Termination bars, reglets, counterflashings, and termination sealants	Included		Included
Protection course over completed waterproofing	Included		Included
Molded-sheet drainage panels with geotextile facing	Included		Included
Seal membrane laps, exposed edges, cuts, and terminations	Included		Included
Patch tears, voids, fishmouths, punctures, and damaged membrane	Included		Included
Temporary protection until backfill and adjacent construction are complete	Included		Included
General Liability Insurance	Included		Included
Bond	Not Included		Not Included
Tax	Not Included		Not Included
Grand Total	\$5,600		\$7,000



8/31/2026

48

Air Barrier & Expansion Control

Logan View Public Schools			8/31/2026
Notes: Bid Package 06			Budget:
Construction Drawings Dated 07/15/2026			\$55,246
Addendums: 1 & 2			Actual:
Project Specifications Dated 07/15/2026			\$49,133
Bold indicates a plug number- number not received from Bidder			\$ (6,113.00)
Subcontractor / Supplier	Kucera	FWRC	
Quote	\$49,133	\$51,800	
Complete self-adhering modified-bituminous sheet waterproofing – Excludes Area C	Included	Included	
Waterproofing at below-grade foundation walls and indicated surfaces	Included	Included	
Substrate cleaning, patching, leveling, and preparation	Included	Included	
Primers, adhesives, mastics, and membrane accessories	Included	Included	
Reinforcing strips at cracks, construction joints, and control joints	Included	Included	
Waterproofing at footing-to-wall intersections and changes in plane	Included	Included	
Waterproofing at inside and outside corners	Included	Included	
Flash and seal all penetrations through waterproofed construction	Included	Included	
Sheet flashing, termination bars, reglets, and counterflashings	Included	Included	
Tie-ins to adjacent waterproofing systems where required	Included	Included	
Complete expansion-joint cover assemblies	Included	Included	
Exterior wall-to-wall expansion-joint assemblies	Included	Included	
Interior wall-to-wall expansion-joint assemblies	Included	Included	
Floor-to-floor expansion-joint assemblies	Included	Included	
Ceiling-to-ceiling expansion-joint assemblies	Included	Included	
Roof expansion-joint cover assemblies	Included	Included	
Extruded aluminum frames, cover plates, and exposed finishes	Included	Included	
General Liability Insurance	Included	Included	
Bond	Not Included	Not Included	
Tax	Not Included	Not Included	
Grand Total	\$49,133	\$51,800	



8/31/2026

Doors, Frames, & Hardware

49

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$328,400

Actual:

\$381,974

Bold indicates a plug number- number not received from Bidder

\$

53,574.00

Subcontractor / Supplier	Midwest Door	Doors Inc	Metal Doors	Walsh	Johnson Hardware
Quote	\$381,974	\$434,449	\$444,380	\$462,511	\$509,800
Wood Doors	Included	Included	Included	Included	Included
Hollow Metal Borrowed Lights	Included	Included	Included	Included	Included
Door Hardware Package	Included	Included	Included	Included	Included
Aluminum Hardware	Included	Included	Included	Included	Included
Hollow Metal Frames	Included	Included	Included	Included	Included
Hollow Metal/Steel Doors	Included	Included	Included	Included	Included
Tornado Shelter Doors/Frames/Hardware	Included	Included	Included	Included	Included
Shop Drawings	4 weeks	4 weeks	4 weeks	4 weeks	4 weeks
General Liability Insurance	Included	Included	Included	Included	Included
Bond	Not Included	Not Included	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included	Not Included	Not Included
Grand Total	\$381,974	\$434,449	\$444,380	\$462,511	\$509,800

Hausmann

8/31/2026

Aluminum Storefront & Glazing

50

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$465,577

Actual:

\$467,020

Bold indicates a plug number- number not received from Bidder

\$

1,443.00

Subcontractor / Supplier	Binswanger	City Glass	Bilden	Brad Fooker
Quote	\$460,118	\$489,922	\$521,416	\$599,900
Aluminum framed storefront	Including	Included	Included	Included
Glazing	Including	Included	Included	Included
Hollow Metal Frame Glazing	Including	Included	Included	Included
Clerestory frames and windows	Including	Included	Included	Included
Mirrors	Including	Included	Included	Included
Door Access	Including	Included	Included	Included
Flashings & Sealants	Including	Included	Included	Included
General Liability Insurance	Included	Included	Included	Included
Bond	\$6,902.00	\$6,902.00	\$6,902.00	\$6,902.00
Tax	Not Included	Not Included	Not Included	Not Included
Grand Total	\$467,020	\$489,922	\$528,318	\$606,802

Hausmann

8/31/2026

Overhead Doors

51

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$62,328

Actual:

\$67,465

Bold indicates a plug number- number not received from Bidder

>

\$

5,137.00

Subcontractor / Supplier	Overhead Door (Norfolk)	AAA Garage Door	Overhead Door (Omaha)	Warren Garage Door	DC Door	PTC (Not All Inclusive)
Quote	\$60,297	\$65,779	\$81,620	\$105,775	\$147,410	\$9,650
Complete overhead and rolling-door systems	Included	Included	Included	Included	Included	Not Included
All OSD-1 insulated steel sectional overhead doors	Included	Included	Included	Included	Included	Not Included
Rolling steel/aluminum counter doors at concessions and service openings	Included	Included	Included	Included	Included	Not Included
Electric operators for all scheduled sectional overhead doors	Included	Included	Included	Included	Included	Not Included
Manual push-up operation for rolling counter doors	Included	Included	Included	Included	Included	Not Included
High-lift tracks coordinated with PEMB clearances and structure	Included	Included	Included	Included	Included	Not Included
Tracks, guides, brackets, supports, bracing, and operating hardware	Included	Included	Included	Included	Included	Not Included
Insulated sectional-door panels with required thermal breaks	Included	Included	Included	Included	Included	Not Included
Full-view window sections and insulated glazing where indicated	Included	Included	Included	Included	Included	Not Included
Custom exterior finish matching adjacent metal-panel colors	Included	Included	Included	Included	Included	Not Included
Perimeter weatherstripping, bottom seals, top seals, and astragals	Included	Included	Included	Included	Included	Not Included
Shop drawings, installation, testing, training, warranties, and closeout	Included	Included	Included	Included	Included	Not Included
Custom Paint Color (Paint in Field)	\$7,168.00	\$7,168.00	\$7,168.00	\$7,168.00	\$7,168.00	Not Included
Coiling Counter Doors	Included	Included	Included	Included	Included	Included
General Liability Insurance	Included	Included	Included	Included	Included	Included
Bond	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Grand Total	\$67,465	\$72,947	\$88,788	\$112,943	\$154,578	\$9,650

Framing, Drywall, & Ceilings

52

Logan View Public Schools

Notes: Bid Package 06	8/31/2026
Construction Drawings Dated 07/15/2026	Budget:
Addendums: 1 & 2	\$1,089,015
Project Specifications Dated 07/15/2026	Actual:
	\$1,209,230
	\$ 120,215.00

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Quote	Ramirez	J&H
Complete cold-formed structural metal framing, including Area F		\$1,187,100	\$1,286,520
Exterior wall studs, headers, jacks, bridging, bracing, clips, deflection connections, and accessories		Included	Included
Complete non-structural metal stud framing and track		Included	Included
Full-height framing to structure and framing above ceilings as indicated		Included	Included
Deflection tracks, slip tracks, firestop tracks, and head-of-wall framing		Included	Included
Framing for gypsum-board ceilings, soffits, bulkheads, clouds, and architectural features		Included	Included
Supplemental framing for doors, borrowed lites, louvers, access panels, equipment, fixtures, and specialties		Included	Included
Exterior and interior sheathing associated with framed walls		Included	Included
Cementitious tile backer board		Included	Included
Exterior gypsum soffit and sheathing board		Included	Included
Install hollow-metal door frames and borrowed-lite frames in metal-stud partitions, including setting, bracing, alignment, anchorage, and coordination with wall construction - Frames furnished by door/frame supplier.		Included	Included
Exterior hardcoat ceiling and soffit systems		\$15,230	\$15,230
Complete gypsum-board ceilings, soffits, bulkheads, and suspended assemblies		Included	Included
Shaftwall assemblies, liner panels, and associated framing where indicated		Included	Included
Acoustical batt insulation within walls and above ceilings		Included	Included
Acoustical sealant at concealed locations, wall perimeters, head-of-wall joints, and penetrations pertaining to this scope		Included	Included
Gypsum-board control joints, expansion joints, corner beads, edge trims, reveals, and accessories		Included	Included
Temporary removal, protection, and reinstallation of ceiling tile and grid required for above-ceiling work		Included	Included
Complete acoustical ceiling tile and exposed suspension grid systems		Included	Included
Ceiling cutouts and reinforcement for lights, diffusers, speakers, sprinklers, fire alarm devices, and other penetrations		Included	Included
Complete suspended linear wood ceiling systems under Section 09 54 26		Included	Included
Tectum wall-panel furring, board insulation, fasteners, splines, trims, touch-up paint, and accessories		Included	Included
Complete FRP-1 interior wall-panel systems where indicated		Included	Included
FRP cutouts, penetrations, terminations, and coordination with fixtures and equipment		Included	Included
Installation of access doors and panels furnished under other sections		Included	Included
Firestopping coordination at rated walls and ceilings		Included	Included
Attic stock and extra materials required by the specifications		Included	Included
Gridline E4 Insulation		\$6,900	\$6,900
Alternate 2		\$17,950	\$17,950
General Liability Insurance		Included	Included
Bond		Not Included	Not Included
Tax		Not Included	Not Included
Grand Total		\$1,209,230	\$1,326,600

Hausmann

8/31/2026

Flooring & Tile

53

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$588,362

Actual:

\$499,891

Bold indicates a plug number- number not received from Bidder

>

Subcontractor / Supplier	Great Plains & Midwest Floor Covering	Great Plains & Complete Floors	Complete Floors (Flooring Only)	Great Plains Tile & Stone (Tile Only)	Midwest Floor Covering (Flooring Only)	Thorton	Midwest Floor Covering (Tile Only)
Quote	\$499,891	\$537,447	\$258,297	\$279,150	\$220,741	\$857,825	\$342,000
Floor & Wall Tile	Included	Not Included	Not Included	Included	Not Included	Included	Included
CPT - Carpet Tile	Included	Included	Included	Not Included	Included	Included	Not Included
WCPT - Walk off carpet tile	Included	Included	Included	Not Included	Included	Included	Not Included
LVT - Luxury Vinyl Tile	Included	Included	Included	Not Included	Included	Included	Not Included
Resilient Base	Included	Included	Included	Not Included	Included	Included	Not Included
AF - Athletic Flooring (	Included	Included	Included	Not Included	Included	Included	Not Included
Floor Transitions Materials	Included	Included	Included	Not Included	Included	Included	Not Included
Alternates							
Alternate A-2	\$29,900.00	\$31,399	\$31,399	N/A	\$29,900	\$29,900	N/A
Alternate A-3	\$4,750.00	\$6,988	\$6,988	N/A	\$4,750	\$4,750	N/A
Alternate A-5	\$14,500.00	\$12,217	\$12,217	N/A	\$14,500	\$14,500	N/A
General Liability Insurance	Included	Included	Included	Included	Included	Included	Included
Bond	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Grand Total: \$499,891.00	\$499,891	\$537,447	\$258,297	\$279,150	\$220,741	\$857,825	\$252,000



8/31/2025

Resinous Flooring

54

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$115,524

Actual:

\$141,248

\$

25,724.00

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Lincoln Epoxy	Surface Sealers			
Quote	\$141,248	\$181,952			
RES-1 broadcast-flake epoxy resinous flooring	Included	Included			
RES-2 broadcast-flake epoxy resinous flooring	Included	Included			
Complete high-build, double-broadcast resinous flooring system	Included	Included			
Primer, surfacing coat, body coats, decorative flakes, grout coat, and urethane topcoat	Included	Included			
Minimum 3/16-inch overall resinous-flooring system	Included	Included			
Four-inch rolled-radius integral resinous cove base	Included	Included			
Resinous flooring and cove base at walls, curbs, columns, and equipment bases	Included	Included			
Resinous flooring applied to casework toe kicks where indicated	Included	Included			
Sloped patching and fill around floor drains and equipment	Included	Included			
Reinforcing membrane at cracks and control joints	Included	Included			
Substrate preparation, grinding, patching, moisture testing, and pH testing	Included	Included			
Locker Rooms, Science Rooms, and Maintenance Building	Included	Included			
Sealed Concrete	Included	Included			
General Liability Insurance	Included	Included			
Bond	Not Included	Not Included			
Tax	Not Included	Not Included			
Grand Total	\$141,248	\$181,952			

Hausmann

8/31/2026

Gym Flooring

55

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$208,408

Actual:

\$189,600

Bold indicates a plug number- number not received from Bidder

\$ (18,808.00)

Subcontractor / Supplier

H2I

Phillips

Quote

\$201,900

\$189,600

Complete wood gymnasium flooring system

Fifteen-mil polyethylene vapor barrier with taped seams

Resilient subfloor pads and sleepers/nailing core strips

Two layers of 15/32-inch plywood subfloor

Additional plywood reinforcement beneath bleacher travel and storage areas

Expansion spaces, blocking, fasteners, and system accessories

Sanding and complete field-applied floor finish

Complete basketball, volleyball, and other game-court striping

Court graphics, school logos, lettering, and painted floor markings

Floor sleeves, access plates, covers, and coordinated floor openings

Vented perimeter gym-floor base

TE-G transitions at doors and adjacent flooring materials

Moisture testing, acclimation, protection, warranties, and closeout

Alternate A-6

\$228,300

\$191,400

General Liability Insurance

Included

Bond

Not Included

Tax

Not Included

Grand Total

\$201,900

\$189,600

Hausmann

8/31/2026

Painting, Wall Coverings, & Joint Sealants

56

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$599,326

Actual:

\$567,433

Bold indicates a plug number- number not received from Bidder

\$ (31,893.00)

Subcontractor / Supplier

Kucera Painting

Quote

\$567,433

Painting - Prime & Finish Coats

Wall Coverings

Background Checks

Mobilizations

Touch Ups

Interior Sealants

Alternates:

Alternate A-2

Alternate A-3

Alternate A-6

General Liability Insurance

Bond

Tax

Grand Total

Included

Included

Included

Included

Included

Included

\$5,000

\$6,900.00


\$24,000

Included

Not Included

Not Included

\$567,433



8/31/2026

Specialty Supply

57

Logan View Public Schools		8/31/2026
Notes: Bid Package 06		
Construction Drawings Dated 07/15/2026		
Addendums: 1 & 2		
Project Specifications Dated 07/15/2026		
Budget:		\$105,645
Actual:		\$88,008
Bold indicates a plug number- number not received from Bidder		\$ (17,637.00)

Subcontractor / Supplier	Homestore Directs	BMSI	EPCO	DH Pace
Quote	\$88,008	\$103,522	\$112,162	\$120,000
Visual Display Units	Included	Included	Included	Included
Corner Guards	Included	Included	Included	Included
Fire Specialities	Included	Included	Included	Included
Bathroom Specialities	Included	Included	Included	Included
General Liability Insurance	Included	Included	Included	Included
Bond	Not Included	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included	Not Included
Grand Total	\$88,008	\$103,522	\$112,162	\$120,000

Hausmann

8/31/2026

Lockers

58

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$99,400

Actual:

\$140,000

Bold indicates a plug number- number not received from Bidder

\$ 40,600.00

Subcontractor / Supplier	Elite Storage	H2I	Storage & Design Group
Quote	\$140,000	\$145,400	\$165,500
Complete metal lockers and locker benches	Included	Included	Included
LK-2: 24"D x 24"W x 72"H double-tier lockers with football pad racks	Included	Included	Included
LK-3: 18"D x 15"W x 72"H double-tier lockers with sloped tops	Included	Included	Included
LK-4: 18"D x 18"W x 72"H single-tier lockers with sloped tops	Included	Included	Included
LK-5: 18"D x 18"W x 72"H double-tier lockers with sloped tops	Included	Included	Included
LK-6: 15"D x 15"W x 48"H single-tier lockers	Included	Included	Included
ADA-accessible lockers in each applicable locker area	Included	Included	Included
LB-1 ADA locker benches	Included	Included	Included
LB-6 six-foot locker benches	Included	Included	Included
LB-8 eight-foot locker benches	Included	Included	Included
Maple butcher-block bench tops with factory-applied sealer	Included	Included	Included
Heavy-duty bench pedestals, anchors, and fasteners	Included	Included	Included
Alternates A-4:	\$62,000	\$52,000	\$52,400
General Liability Insurance	Included	Included	Included
Bond	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included
Grand Total	\$140,000	\$145,400	\$165,500

Hausmann

8/31/2026

Signage

59

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$107,500


Actual:

\$76,830

\$ (30,670.00)

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Tri City Sign	Ace Sign Display	Nebraska Sign	
Quote	\$76,830	\$80,224	\$89,867	
Complete interior and exterior signage systems	Included	Included	Included	
Field-applied vinyl lettering, graphics, and wall text	Included	Included	Included	
Illuminated "RAIDERS" dimensional-letter sign at Area E	Included	Included	Included	
Backlit aluminum channel letters, returns, faces, LEDs, drivers, and accessories	Included	Included	Included	
Custom perforated-metal exterior signage panels at Area E	Included	Included	Included	
Solid-letter pattern within the perforated signage panels	Included	Included	Included	
Aluminum support rails, frames, and backing attached to the PEMB	Included	Included	Included	
Self-supporting signage framing and attachment system	Included	Included	Included	
Blue signage panels and components matching MP-4 school blue	Included	Included	Included	
All additional exterior lettering, logos, graphics, and identification signage	Included	Included	Included	
Internal sign illumination, wiring, power supplies, drivers, disconnects, and controls	Included	Included	Included	
General Liability Insurance	Included	Included	Included	
Bond	Not Included	Not Included	Not Included	
Tax	Not Included	Not Included	Not Included	
Grand Total	\$76,830	\$80,224	\$89,867	

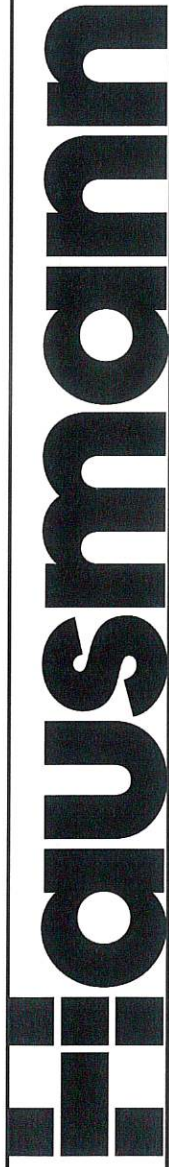

8/31/2026

Gym Equipment

60

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:


\$166,300

Actual:

\$177,020

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Porter Trustin Carlson	Carroll Seating	Phillips	H2I	
Quote	\$173,650	\$197,462	\$208,000	\$290,800	
Complete gymnasium equipment systems	Included	Included	Included	Included	
Ceiling Hung Basketball Equipment	Included	Included	Included	Included	
Wall Padding	Included	Included	Included	Included	
Volleyball Equipment	Included	Included	Included	Included	
Gym Divider Curtain	Included	Included	Included	Included	
Powered basketball-goal height adjusters as scheduled	\$3,370.00	Included	Included	Included	
Volleyball Equipment	Included	Included	Included	Included	
Retractable Batting Cage	Included	Included	Included	Included	
Owner Furnish Equipment Installation	Included	Included	Included	Included	
General Liability Insurance	Included	Included	Included	Included	
Bond	Not Included	Not Included	Not Included	Not Included	
Tax	Not Included	Not Included	Not Included	Not Included	
Grand Total	\$177,020	\$197,462	\$208,000	\$290,800	

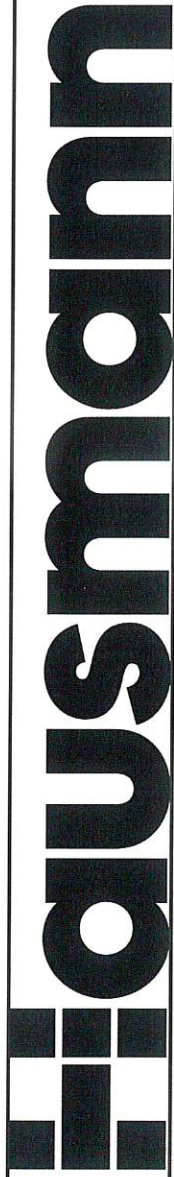

8/31/2026

Telescoping Bleachers

61

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$122,850

Actual:

\$165,379

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier

Carroll Seating

Quote

\$165,379

Complete powered telescoping gymnasium bleacher systems

Three-row bleacher bank with approximately 200 seats

Seven-row bleacher bank with approximately 385 seats

Friction-power extension and retraction systems

Motors, controllers, safety disconnects, and walk-along pendant controls

Vinyl end curtains enclosing exposed areas beneath extended bleachers

Complete anchors, floor attachments, stops, brackets, and accessories

Engineering, code compliance, shop drawings, field measurements, and coordination

Installation, startup, testing, adjustment, training, warranties, and closeout

General Liability Insurance

Bond

Tax

Grand Total

\$165,379

Hausmann

8/31/2026

Window Treatments

63

Logan View Public Schools

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Bold indicates a plug number- number not received from Bidder

8/31/2026

Budget:


\$14,880

Actual:

\$1,891

\$ (12,989.00)

Subcontractor / Supplier	Anderson Blinds	Nebraska Window Coverings		
Quote	\$1,891	\$2,900		
Complete roller window shades – Excludes Area C	Included	Included		
W/C-1 manual-clutch roller shades	Included	Included		
W/C-1 3%-open solar-control fabric	Included	Included		
W/C-2 manual-clutch blackout roller shades	Included	Included		
W/C-2 0%-open blackout fabric	Included	Included		
Hunter Douglas RB 500+ or approved equal	Included	Included		
Complete installation, adjustment, cleaning, and Owner training	Included	Included		
General Liability Insurance	Included	Included		
Bond	Not Included	Not Included		
Tax	Not Included	Not Included		
Grand Total	\$1,891	\$2,900		



8/31/2026

Fire Suppression

64

Logan View Public Schools

8/31/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$192,008

Actual:

\$210,511

\$

18,503.00

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Mahoney Fire	Big Red Fire	Fire & Security
Quote	\$207,400	\$209,545	\$413,391
Fittings, Hardware, Hangers, & Accessories	Included	Included	Included
Shop Drawings & Engineered Design	Included	Included	Included
New sprinkler main section within the existing basement	Included	Included	Included
Relocation of existing sprinkler heads and branch lines	Included	Included	Included
Includes Final Testing & Inspections	Included	Included	Included
Alternate A-2	\$9,800.00	\$6,255.00	\$9,800.00
General Liability Insurance	Included	Included	Included
Bond	3,111.00	4,190.90	Not Included
Tax	Not Included	Not Included	Not Included
Grand Total	\$210,511	\$213,736	\$413,391



9/1/2026

Plumbing, HVAC, & Controls

66

Logan View Public Schools

9/1/2026

Notes: Bid Package 06

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$4,401,737

Actual:

\$6,441,946

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Midlands Mechanical (Combined)	Redlinger & Rutts (Combined)	Getzschman Heating (Combined)	MTC	Rutts	Tessiers	Midlands Mechanical	Kleier Enterprise Inc	Redlinger	Christopher Mechanical	Albireo Energy
Quote	\$6,441,945	\$6,630,843	\$7,952,061	\$4,984,037	\$3,891,674	\$5,760,960	\$2,550,271	\$2,244,628	\$2,739,169	\$558,450	\$496,454
Demo of HVAC equipment	Included	Included	Included	Included	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included
Furnish and install all HVAC Equipment	Included	Included	Included	Included	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included
Dust Collection System	Included	Included	Included	Included	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included
Air Filtration System	Included	Included	Included	Included	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included
Air Compression System	Included	Included	Included	Included	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included
HVAC Controls - DDC/BAS	Included	Included	Included	Included	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included
Extended Warranty - Gym RTU	Included	Included	Included	Included	Included	Included	Not Included	Not Included	Not Included	Not Included	Included
Plumbing Fixtures	Included	Included	Included	Included	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included
Infrared Heaters	Included	Included	Included	Included	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included
All Plumbing Work	Included	Included	Included	Not Included	Not Included	Not Included	Included	Included	Included	Not Included	Not Included
Propane Connections	Included	Included	Included	Not Included	Not Included	Not Included	Included	Included	Included	Not Included	Not Included
Hydronic piping	Included	Included	Included	Not Included	Not Included	Not Included	Included	Included	Included	Included	Not Included
Alternate 2	\$5,245	\$5,245	\$5,335	\$6,140	\$5,245	\$9,950	N/A	N/A	N/A	N/A	N/A
Alternate 3	\$1,108	\$1,108	\$1,070	\$1,478	\$1,108	\$2,850	N/A	N/A	N/A	N/A	N/A
Alternate M-1	\$4,350	\$4,350	\$4,833	\$6,850	\$4,350	\$6,850	N/A	N/A	N/A	N/A	\$9,325
Insurance	Included	Included	Included	Included	Included	Included	Included	Included	Included	Included	Included
Bond	Included	\$70,869	\$99,401	\$99,401	\$58,376	\$33,950	Not Included	Not Included	Not Included	Not Included	Not Included
Sales Tax	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Grand Total	\$6,441,945	\$6,712,415	\$8,552,200	\$5,587,406	\$3,891,674	\$5,760,960	\$3,039,771	\$2,734,128	\$3,228,669	\$1,047,950	\$496,454



8/31/2026

67

Electrical & Low Voltage Systems

Logan View Public Schools

8/31/2026

Notes: Bid Package 06 - 100% CD's

Construction Drawings Dated 07/15/2026

Addendums: 1 & 2

Project Specifications Dated 07/15/2026

Budget:

\$2,814,004

Actual:

\$1,924,388

\$ (889,616.10)

Bold indicates a plug number- number not received from Bidder

Subcontractor / Supplier	Precision Electric	Vandenberg Electric	Diode Tech	CCS	Computer Cable Connections	Yandas	Forte	KCAV
Quote	\$1,874,996	\$2,220,570	\$330,083	\$218,149	\$157,258	\$198,099	\$229,038	\$270,863
Electrical demo (cut, cap. & make safe)	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Conductors from transformers into building. Includes final connections/landing.	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
MDPs, panelboards, feeders, breakers, disconnects, and associated distribution equipment	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
All lighting & power for - interior - exterior, site, emergency, and exit lighting. Includes maintenance building, new additions, and removals	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Temp power as needed for the duration of the project	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Receptacles, floor boxes, wiring devices, and branch circuitry	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Power and final connections to mechanical, plumbing, gas equipment, athletic equipment, and specialty equipment.	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Lighting Controls, Programming, and Commissioning.	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Modifications to existing switchboards MSP & MSH	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Complete Fire Alarm System (Multiple phases)	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Complete Clock System	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Complete Audio-Visual System	Included	Included	Included	Included	Included	Included	Included	Included
Security Access & Control - Rough in only	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Paging & Intercom System	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Telecom & Data	Included	Included	Included	Included	Included	Included	Included	Included
Emergency Responder Radio System	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Install of owner provided equipment as directed by LVPS	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
VFDs furnished by HVAC - Installed by Electrical Subcontractor	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Projector Screens	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Install of automatic door operators and ADA push buttons	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
GSP-1 / AGV-1 / GSB-1 (Gas Safety Panel)	Included	Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Construction trailer temp power	\$2,517.00	\$2,517.00	\$2,517.00	\$2,517.00	\$2,517.00	\$2,517.00	\$2,517.00	\$2,517.00
Alternate 2	\$8,000	\$29,700	N/A	N/A	N/A	N/A	N/A	N/A
Alternate 3	\$9,991	\$19,200	N/A	N/A	N/A	N/A	N/A	N/A
Alternate 4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Alternate 5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Alternate 6	\$120,402	\$85,000	N/A	N/A	N/A	N/A	N/A	N/A
General Liability Insurance	Included	Included	Included	Included	Included	Included	Included	Included
Bond	46,874.90	\$57,960.00	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Tax	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Grand Total	\$1,924,388	\$2,223,087	\$332,600	\$220,666	\$159,775	\$200,616	\$231,555	\$273,380