


{Paving} Bond Interest

Item 1 – 60' x 250' concrete extension at Redneck Lot (6" reinforced concrete over lime stabilized subgrade, existing grades assumed to be appropriate for placement) - **\$253,162.00**



Item 2 – 720' road from redneck lot concrete extension to Ag building (assumed at 22' width, 6" reinforced concrete over lime stabilized subgrade, existing grades assumed to be appropriate for placement) - \$193,370.00

Revision to Item 2 as discussed: Road from asphalt drive north of Redneck Lot to Ag Building Parking Lot, 22' road width. 6" reinforced concrete over lime stabilized subgrade. Strip and haul existing gravel to the softball parking area and roll-in. Revised pricing - \$281,435.00

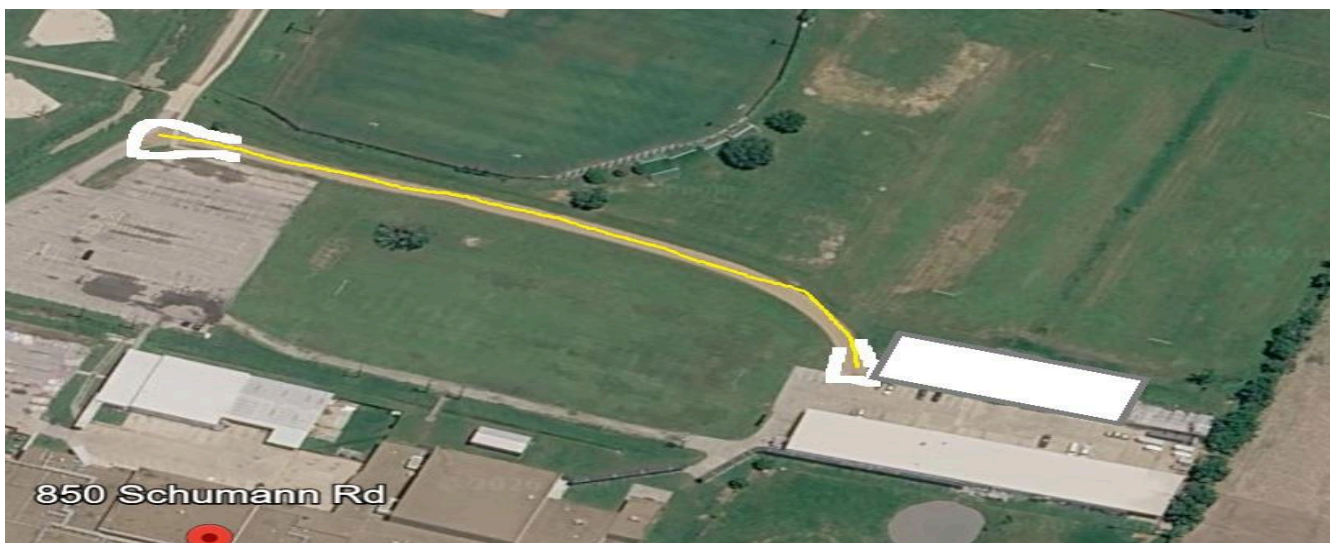

{Paving} Bond Interest

Item 3 – pulverize, mix, and stabilize existing asphalt and base, place 6” reinforced concrete over new stabilized subgrade, increasing grades by approximately 6”; 84,000 SF - \$1,056,483.00